


POSC12100A-2555-11

Zasilacz POSC 12V/1A/12W, adapter czarny, gniazdo AC:CEE
7/16. wtyk 2.5x5.5x11mm prosty

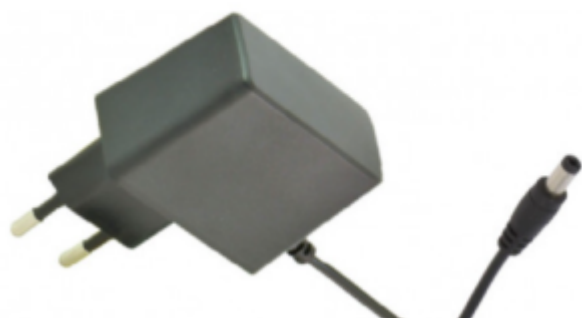

ELECTRICAL SPECIFICATION

Housing type	Wertykalny
Output Voltage	12V DC
Rated Current	1A
Power (W)	12
Dimming	No
Voltage Ripple & Noise (max.)	200mVp-p
Line Regulation	± 5%
Load Regulation	± 5%
Setup, Rise Time	100ms
Hold up Time (typ.)	3ms
AC input voltage range	Universal
Protection class	II
PFC	No
Efficiency (typ.)	82.96%
AC Current (typ.)	0.4A
No Load Power Consumption (typ. / max.)	<0.10W
IP protection level	IP20
Over Current / Overload protection (range)	1.1A-1.8A
Over Current / Overload protection	Type: auto-recovery.
Short Circuit protection	Close output, recovers automatically after fault removed
Over Voltage protection	Close output, recovers automatically after fault removed
Working Temperature range	-5°C ÷ 40°C

Working Humidity range	5 ÷ 95% RH
Storage Temperature and Humidity	-40°C ÷ 85°C, 5 ÷ 90% RH
Safety Standards	Compliance to EN62368-1
Withstand Voltage	IN/OUT: 3.6kVAC
Isolation Resistance	IN/OUT: 50MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55032
EMC Immunity	EN 61000-4-3, EN 61000-4-4, EN 61000-4-5
Harmonic Current	Compliance to EN61000-3-2, EN61000-3-3
Dimensions (L x W x H)	56.0 x 28.0 x 42.0mm
Weight (kg)	0.67
Warranty	3 years
Mounting	Wall mounted
DC Plug	2.5/5.5 mm
Programmable	No

MECHANICAL SPECIFICATION